

# IIT TII MIDAS

L i v i n g M a d e B e t t e r



At Midas we aim to make living better.

Certified and registered flooring experts we will take care of all your flooring requirements from timber, laminate, hybrid and carpet. All your flooring requirements will be met with us.

5 year  
Commercial Wear  
Warranty

25 year  
Domestic Wear  
Warranty

Lifetime  
Structural  
Warranty

atfa

M E M B E R

Australasian  
**Timber Flooring**  
Association

[www.atfa.com.au](http://www.atfa.com.au)

# TIMBER



ETTM01



ETTM02



ETTM03



ETTM04



ETTM05



ETTM06



ETTM07



ETTM08



ETTM09



ETTM10



Available in following sizes:

Straight Plank: 14\*190\*1900mm, 15\*190\*1900mm, 20\*220\*2200mm

Herringbone: 15\*120\*600mm

Chevron: 15\*125\*770mm

Matching Nosing available

#### Warranty Terms & Conditions:

All Midas timber products comes with a 20 years Residential Wear Warranty from the date of purchase in accordance with the conditions set out below.

Residential wear warranty – warranty covers wear through the hardwood timber surface of the floor in any single area greater than 1m<sup>2</sup> within 20 years of the purchased date. This warranty subject to standard household conditions, the 'wear' layer will not wear through to the design layer, this is defined as the surface layer showing a visual change in appearance due to wearing. Damage resistance does not include scratches, chips, dents, tears or gaps due to seasonal movement of planks. It also does not apply to loss of gloss or gloss variation due to natural ageing, or any change in appearance due to events described in the General Conditions.

Lifetime Structural warranty – warranty covers manufacturing faults including warping, twisting, bucking or bond failure during the warranty period. This warranty does not cover defects such as cupping or doming (reasonable uniform convexing or concaving shape across the width of the surface of installed boards) that induced by factors due to installation or the installation environment that are outside of manufacturer's control. Wonderwood Timber Flooring installation Instruction must be followed closely when installing. Wonderwood Timber Flooring Care & Maintenance Instructions should always be followed once the installation is completed.

#### General Conditions

1. Midas timber flooring is designed solely for indoor use in a residential premise. All installations must be professionally installed according to Midas Installation Instructions.

2. This warranty applies only to the original purchaser of the floor and is not transferable, unless in the case the builder or developer purchases the floor, the occupant of the residential premise will be entitled to cover under this warranty in 12 months after purchase of the floor. Warranty will be effective from the date of the initial purchase in all circumstances.

3. Please ensure all the receipt, invoice or statement has been kept as a proof of purchase from the retailer that shows the details of the product, price, installation address and the date of purchase for Wonderwood to know the best way of helping for after sales service.

4. A minimum of 5% of the total installed flooring area must be set aside for the warranty to apply.

5. This warranty applies when Wonderwood Timber Flooring is installed in a residential, inhabitable area protected from direct sunlight and heat, where temperature and humidity levels can be controlled.

6. This warranty does not apply when Midas timber flooring is - installed in wet areas/rooms, such as bathrooms, toilets or laundries, or installed in areas/rooms where built in drains is present or required, such as showers or sauna - installed in areas/rooms where floors have been exposed to excessive direct sunlight or moisture (either on the surface or infiltrate underneath the surface) - damaged by water/liquid directly caused by spillage, appliance failure, floods or any other forms of water exposure - damaged or wear due to improper installation, such as not providing expansion joints (please refer to Wonderwood installation guide), or improper maintenance (please refer to Wonderwood care and maintenance) - any failure or improper installation due to sub-floor structural reforms, improper building setting or an uneven subfloor that has not been properly levelled (+/- 2mm over 1000mm) - any failure or improper floating floor installation, such as not insulating the floor against damp subfloor - any minor spills, wood checks/cracks caused by timber nature - chips, scratches, marks, dents, permanent stains and other forms of damage due to misuse, abuse, dragged objects, stiletto heels, heavy furniture, dropped items, dirt/sand, gravel, wheels, or any other mechanical means, (such as exposed to extremely hot material, chemicals or industrial products, except for recommended care products mentioned in Wonderwood care and maintenance guide) - improper alterations, repaired, refinished or reinstalled.

7. This warranty does not cover labour or other expenses of any rectification work (such as repairing, removal of furniture or fixtures and accommodation) other than the supply of replacement flooring (and scotia beading if necessary), due to extreme weather conditions is to be expected. It is critical to be aware of and to check conditions to ensure that your floor performs within tolerances. Installing your timber floor according to Wonderwood installation guidelines is crucial for a high-performing floor. Before beginning any installation, please read Wonderwood installation guides.

# HYBRID



Technical Data	
Type:	Hybrid Flooring
Dimensions:	1500mm x 180mm
Thickness:	6.5mm
Wear Layer:	0.5mm
Units Per Box:	6 boards
m <sup>2</sup> per box:	1.62
m <sup>2</sup> per pallet:	113.4
Colours:	12
Finish:	Matte
Surface:	Embossed
Top Layer:	Decorative Film & Wear Layer
Substrate Layer:	Trigonelli Core Technology (Limestone Composite)
Backing Layer:	1.5mm Acoustic Backing
Profile:	Micro Bevel
Cooling System:	PUR & Scratch Resistance
Installation Method:	Uniclic®
Performance	
Dimensional Stability:	(ISO 23999) Length: 0.05%, Width: -0.00%, Curling: 0.00%
Thermal Resistance:	(EN 12667) 0.056m <sup>2</sup> K/W
Thermal Conductivity:	(EN 12667) 0.115 W/m.K
Abrasion Rating:	(EN 660-2) Group T
Swelling after submersion in water:	(ISO 24336) 0.3%
Impact Sound Reduction:	Please refer to Geffrey Hybrid Acoustic Performance specification sheet
Light Fastness:	(EN ISO 105-B02) Grade 6
Light Reflectance Values:	Available on Request
Flammability:	(EN ISO 9239) CHF 10.9kW/m <sup>2</sup>
Smoke Value:	(EN ISO 9239) 81% minutes
Slip Resistance:	(AS 4586) P3
Warranty:	25 Year Hybrid Limited Residential Warranty
Sustainability	
Product Transparency:	Global Green Tag, GreenPlate Level A certified.
Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Global Green Tag:	GreenPlate Level A Certified
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits




Available in following sizes:  
 Straight Plank: 1540\*228\*5.5mm, 1800\*228\*9mm, 1540\*182\*6.5mm  
 Matching Nosing available

# LAMINATE




Technical Data	
Type:	Laminate Flooring
Dimensions:	1200mm x 190mm
Thickness:	8mm
Units Per Box:	7 boards
m <sup>2</sup> per box:	1.596
m <sup>2</sup> per pallet:	95.76
Colours:	12
Country of Origin:	Belgium
Finish:	Matte
Surface:	Embossed
Substrate Layer:	850kg/m <sup>3</sup> High Density Fibreboard
Backing Layer:	Balancing Layer
Profile:	Pressed Bevel
Installation Method:	Unilin®
Performance	
Classification:	(ISO 10874) 23,32
Abrasion (EN 13329):	AC4
Rating:	Please refer to Godfrey Hirst Acoustic Performance specification sheet
Impact Sound Reduction:	(EN ISO 105-B02) Class 8 - Blue Reference
Light Fastness:	(EN ISO 105-B02) Class 8 - Blue Reference
Flammability:	(EN ISO 9239) CRF 6.1kW/m <sup>2</sup>
Smoke Value:	(EN ISO 9239) 11% minutes
Slip Resistance:	(AS 4586) P2
Sustainability	
Product Transparency:	PEFC™ Chain of Custody certified.
Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Indoor Air Quality:	Green Building Council Compliant for VOC emission rate limits

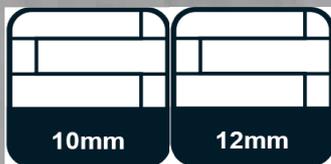

Available in following sizes:  
 Straight Plank: 11515\*237\*10.3, 2250\*235\*12.3  
 Matching Nosing available

# CARPET

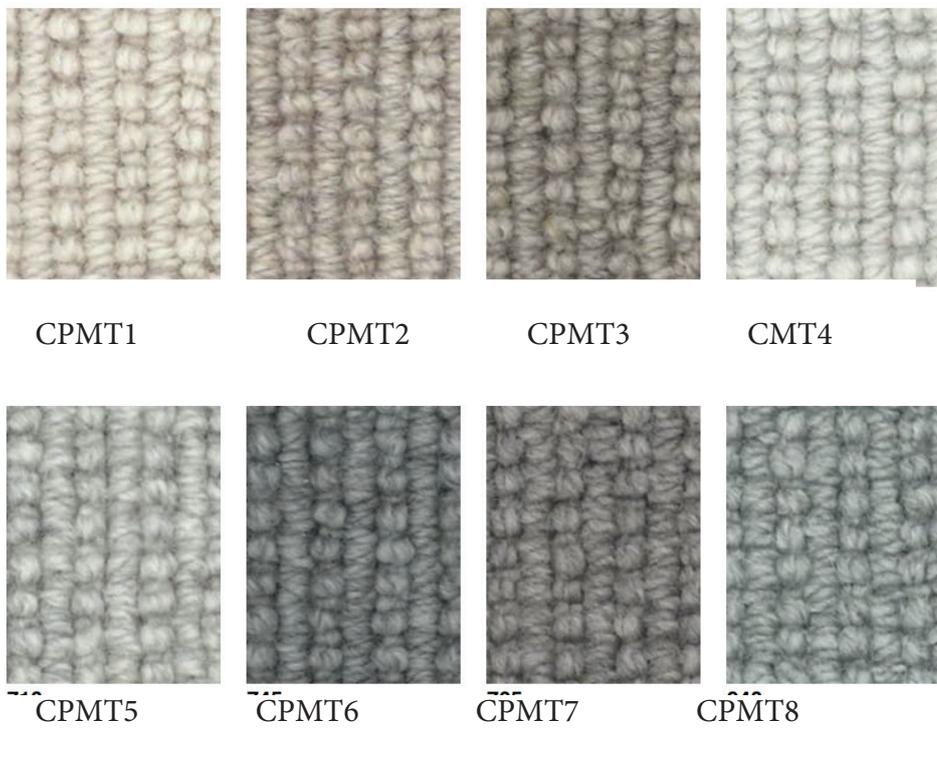

Technical Data	
Type:	Wool Carpet
Style:	Level Loop Pile
Thickness:	10.5 (+/- 1.0)mm
Yarn:	100% Wool
Gauge:	15.719cm (14th Gauge)
Roll Width:	4.00m
Pattern Repeat:	1.20m (w) x 0.80m (l)
Colours:	8
Country of Origin:	New Zealand
Secondary Backing:	Jute
Installation Method:	Conventionally Laid
Performance	
Guarantee:	15 Year Hycrest Limited Residential Guarantee*
ACCS Rating:	Residential Extra-Heavy Duty - 6 Star Commercial Medium Duty - 2 Star
Sustainability	
Declare Certification:	Declare Red List Free
Accreditation:	Manufactured under a quality and environmental system certified and complying with ISO 9001 and ISO 14001 by an accredited certification body.
Green Star:	Environmental Certification Scheme (ECS), Level 4 Maximum Points - Certificate #51206
Indoor Air Quality:	Green Building Council compliant for VOC emission rate limits



Available in 100% Wool and Synthetic options  
Average roll width 3.66m

For your other renovation or new  
built requirements contact Bruce  
from

**Midas Build**

at

13000MIDAS  
(1300064327)





Showroom: 42 Buffalo Road, Gladesville NSW  
Phone: 13000MIDAS (1300064327)  
Email: [info@mfloors.au](mailto:info@mfloors.au)  
[www.mfloors.au](http://www.mfloors.au)